

CPA-500N-1

Enclosure Air Conditioner


Certification

Modbus protocol

RS485



Dimension

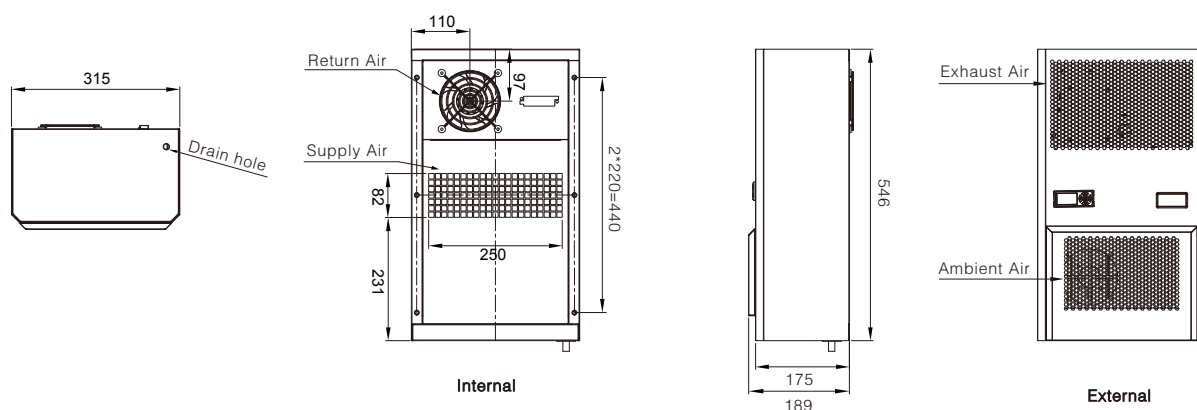

Technical data

Model	CPA-500N-1
Cooling capacity	500W, 1705BTU/h
Nominal voltage	220V/50Hz/60Hz
Nominal capacity	(L35/L35) 210W, (L35/L55) 260W
Nominal current	1.0A
Dimensional	315*546*175mm
Installation	Screw mounting
Operating temperature	(-10°C~+55°C)
Setpoint temperature	(+28°C~+40°C)
Air flow	120m³/h
IP rating	Internal IP54/External IP34
Refrigerant Type	R134a
Noise level	60dB
Finish	Power coated RAL7035
Weight	15Kg
Filter	Yes
Condensate evaporation	It is optional and can be ordered according to your specific requirements

L35/L35 represents the nominal cooling capacity tested when both the internal and external temperatures are 35°C, while L35/L55 represents the cooling capacity tested with an internal temperature of 35°C and an external temperature of 55°C.

CPA-1000N-1

Certification


Modbus protocol

RS485

Enclosure Air Conditioner



Dimension

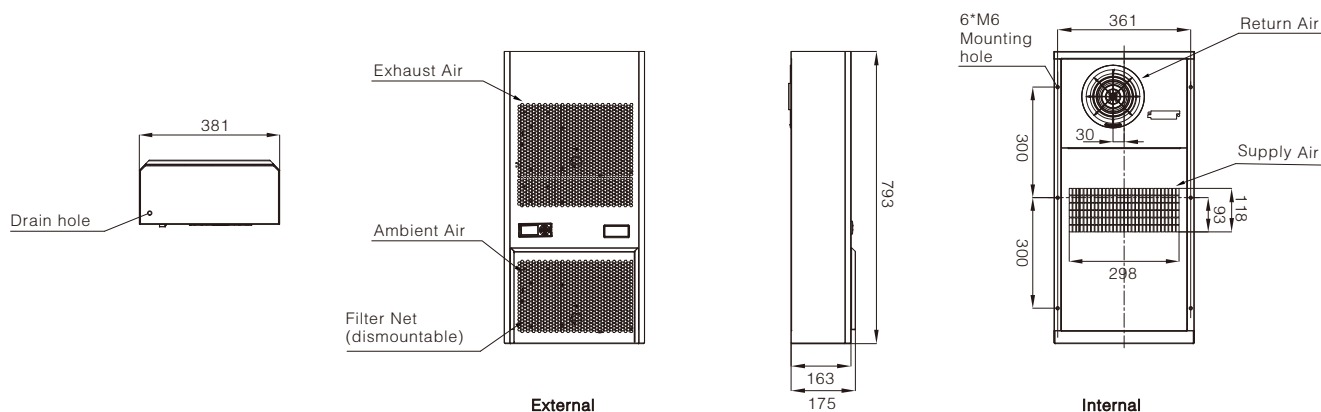

Technical data

Model	CPA-1000N-1
Cooling capacity	1000W, 3412BTU/h
Nominal voltage	220V/50Hz/60Hz
Nominal capacity	(L35/L35) 440W, (L35/L55) 600W
Nominal current	2.0A
Dimensional	381*793*163mm
Installation	Screw mounting
Operating temperature	(-10°C~+55°C)
Setpoint temperature	(+28°C~+40°C)
Air flow	440m³/h
IP rating	Internal IP54/External IP34
Refrigerant Type	R134a
Noise level	65dB
Finish	Power coated RAL7035
Weight	30Kg
Filter	Yes
Condensate evaporation	It is optional and can be ordered according to your specific requirements

L35/L35 represents the nominal cooling capacity tested when both the internal and external temperatures are 35°C, while L35/L55 represents the cooling capacity tested with an internal temperature of 35°C and an external temperature of 55°C.

CPA-1500N-1

Enclosure Air Conditioner


Certification

Modbus protocol

RS485



Dimension

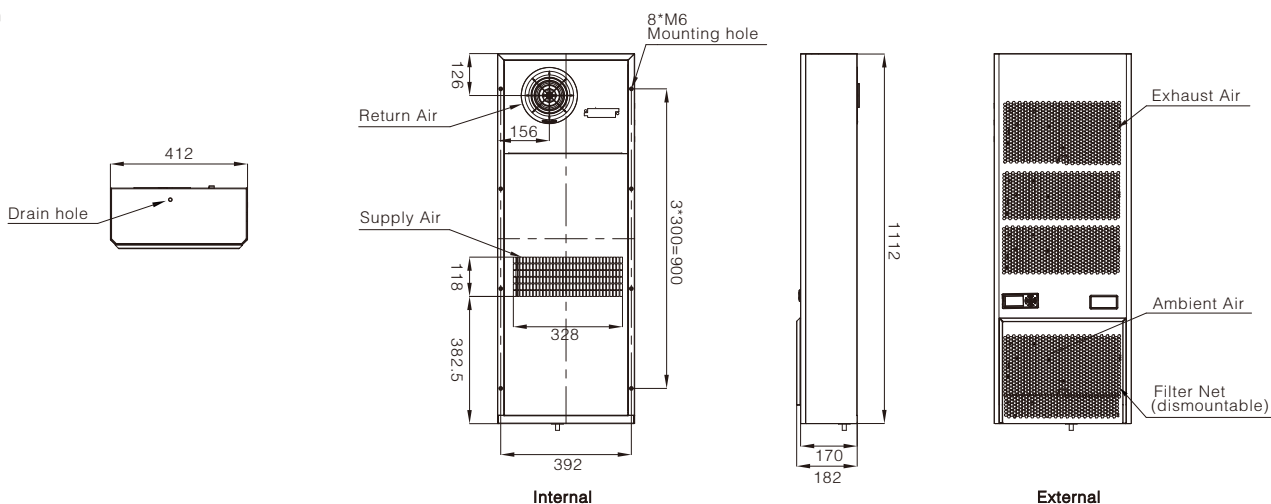

Technical data

Model	CPA-1500N-1
Cooling capacity	1500W, 5118BTU/h
Nominal voltage	220V/50Hz/60Hz
Nominal capacity	(L35/L35) 650W, (L35/L55) 820W
Nominal current	3.0A
Dimensional	412*1112*170mm
Installation	Screw mounting
Operating temperature	(-10°C~+55°C)
Setpoint temperature	(+28°C~+40°C)
Air flow	490m³/h
IP rating	Internal IP54/External IP34
Refrigerant Type	R134a
Noise level	65dB
Finish	Power coated RAL7035
Weight	40Kg
Filter	Yes
Condensate evaporation	It is optional and can be ordered according to your specific requirements

L35/L35 represents the nominal cooling capacity tested when both the internal and external temperatures are 35°C, while L35/L55 represents the cooling capacity tested with an internal temperature of 35°C and an external temperature of 55°C.

CPA-3000N-1

Cabinet Climate Control


Enclosure Air Conditioner

Certification

Modbus protocol
RS485



Dimension

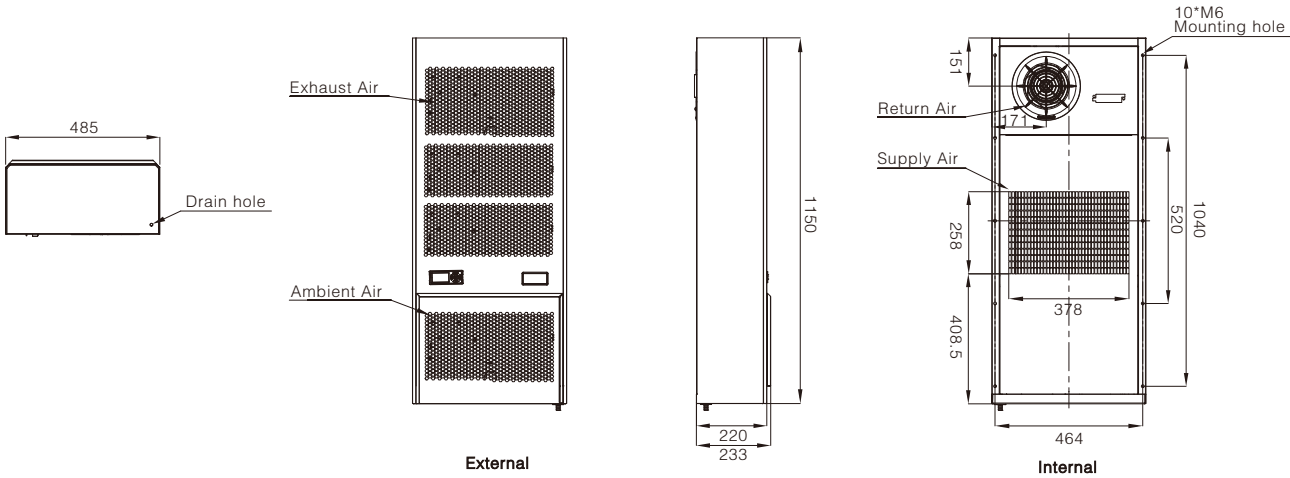

Technical data

Model	CPA-3000N-1
Cooling capacity	3000W, 10236BTU/h
Nominal voltage	220V/50Hz/60Hz
Nominal capacity	(L35/L35) 1300W, (L35/L55) 1650W
Nominal current	5.9A
Dimensional	485*1150*220mm
Installation	Screw mounting
Operating temperature	(-10°C~+55°C)
Setpoint temperature	(+28°C~+40°C)
Air flow	950m³/h
IP rating	Internal IP54/External IP34
Refrigerant Type	R134a
Noise level	65dB
Finish	Power coated RAL7035
Weight	50Kg
Filter	Yes
Condensate evaporation	It is optional and can be ordered according to your specific requirements

L35/L35 represents the nominal cooling capacity tested when both the internal and external temperatures are 35°C, while L35/L55 represents the cooling capacity tested with an internal temperature of 35°C and an external temperature of 55°C.

CPA-4000N-1

Certification



Modbus protocol

RS485


Enclosure Air Conditioner



Dimension

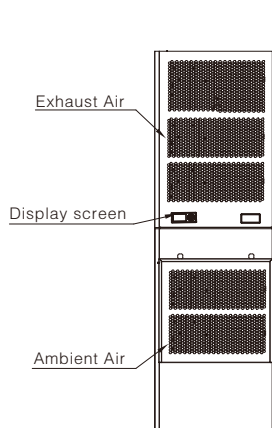

External

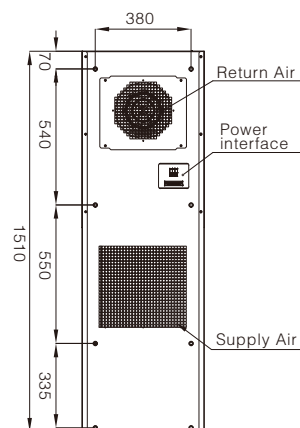

Internal

Technical data

Model	CPA-4000N-1
Cooling capacity	4000W, 13650BTU/h
Nominal voltage	220V/50Hz/60Hz
Nominal capacity	(L35/L35) 1725W, (L35/L55) 1840W
Nominal current	7.8A
Dimensional	485*1510*306mm
Installation	Screw mounting
Operating temperature	(-10°C~+55°C)
Setpoint temperature	(+28°C~+40°C)
Air flow	1250m³/h
IP rating	Internal IP54/External IP34
Refrigerant Type	R134a
Noise level	68dB
Finish	Power coated RAL7035
Weight	80Kg
Filter	Yes
Condensate evaporation	It is optional and can be ordered according to your specific requirements

L35/L35 represents the nominal cooling capacity tested when both the internal and external temperatures are 35°C, while L35/L55 represents the cooling capacity tested with an internal temperature of 35°C and an external temperature of 55°C.